




# LT-3200-6A Constant Voltage LED Dimmer

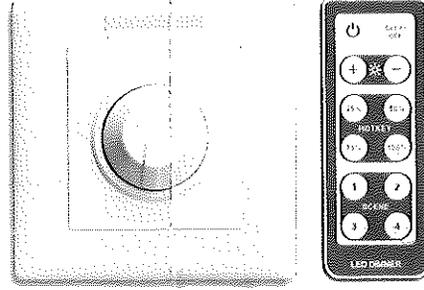


LT-3200 series LED intelligent dimmer is dedicated to adjust the brightness of LED lights, which adopted the most advanced PWM (Pulse-Width Modulation) digital brightness-adjusting technology, users can either operate manually or use the IR wireless remote to control the brightness in the distance, they are suitable for commercial and household 86-style socket installation, the socket can be installed outside or inside the wall. LED intelligent dimmer can meet different brightness requirements at different time, and can extend life of LED, suitable for adjusting the brightness of both low-power and hi-power LED illumination lights, energy-saving.

### 1. Product Parameter:


LT-3200-6A

Input Voltage:	12 ~ 48Vdc	Working Temperature:	-30°C ~ 55°C
Output Signal:	CV PWM	Switch Dimensions:	L87×W87(mm)
Max Load Current:	6A	Remote Dimensions:	L86×W33(mm)
Max Output Power:	72W/144W/216W/288W(12V/24V/36V/48V)	Packaging Dimensions:	L96×W91×H61(mm)
Dimming Range:	0-100%	Weight (G.W):	175g


### 2. Product Size:

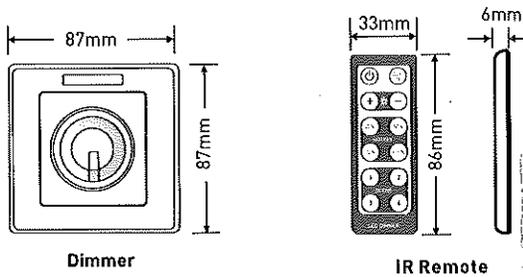

### 3. Installation Instruction:




### 4. Key Functions and Terminal Instruction:

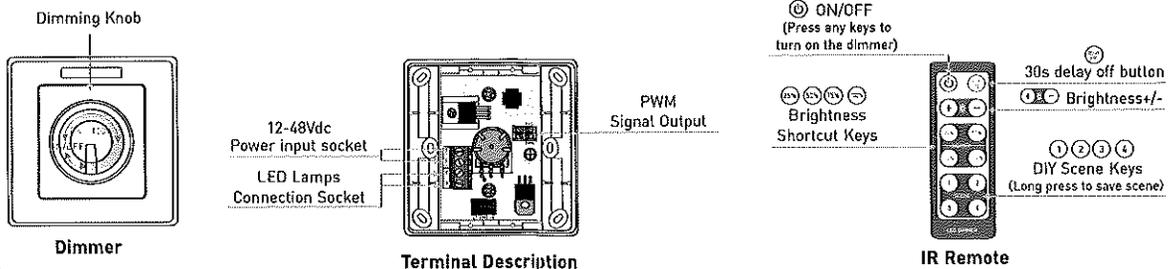


5. Wiring Diagram:

5.1 Connecting LED lights:

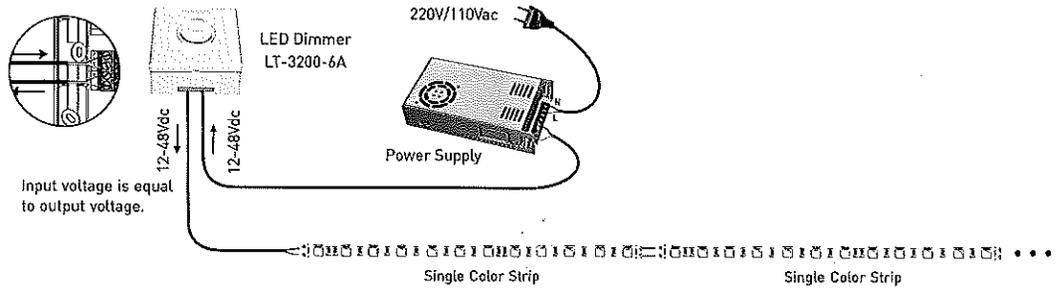

5.2 Offer PWM dimming signal to drive other equipment:

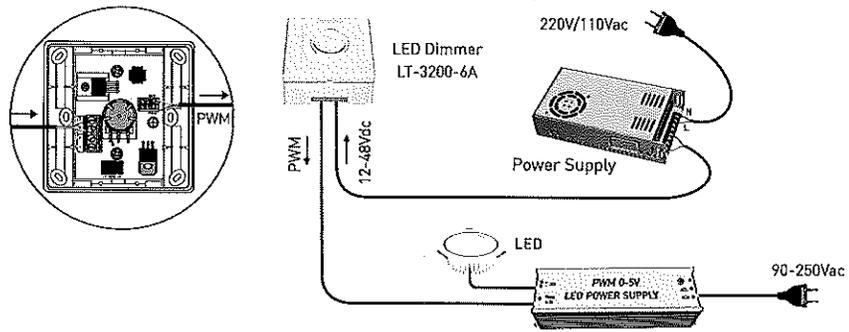

5.3 You can add our constant voltage power repeater LT-3010-12A to expand power output unlimitedly.

